


RUFFLE BRUNCH SET

③ INTERMEDIATE | 11 SIZES

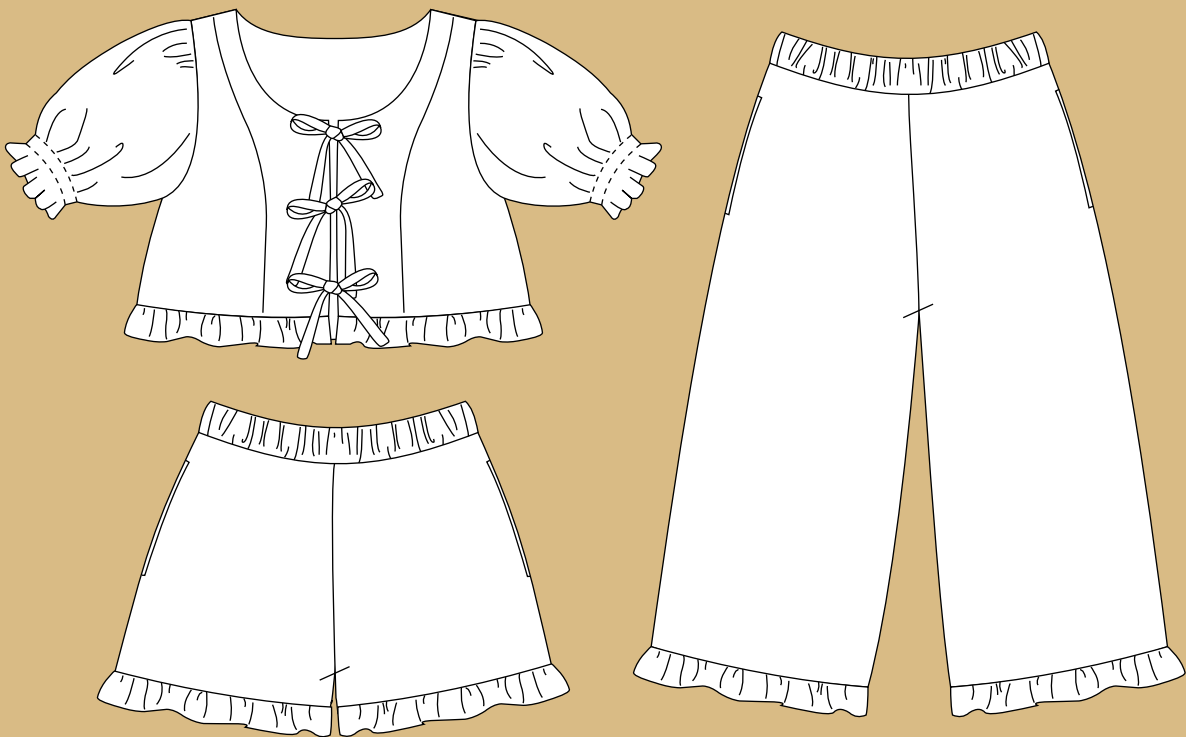

MATCHY MATCHY

SEWING CLUB



about us




Matchy Matchy Sewing Club is a playground of discovery for everyone who loves to sew and anyone who's ever wanted to! Where memories are created from scratch, mistakes are magic, and mixing it up has a way of bringing everything together.

our philosophy

We see sewing as more than sewing: it's a whole creative experience. A chance to solve a puzzle, build confidence, find your style, make memories, and have fun!

what to expect

Beginner-friendly, design-forward sewing patterns that are as fun to make as they are to wear. Grab what you've got, make it your own, and enjoy the process from beginning to let's-do-that-again.

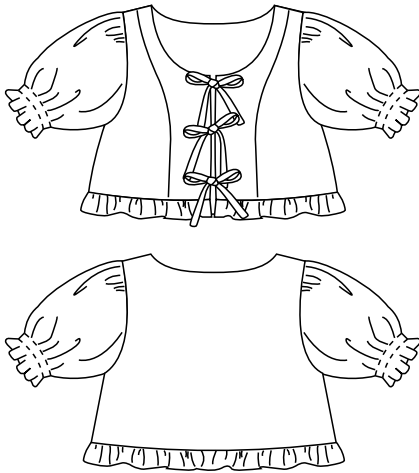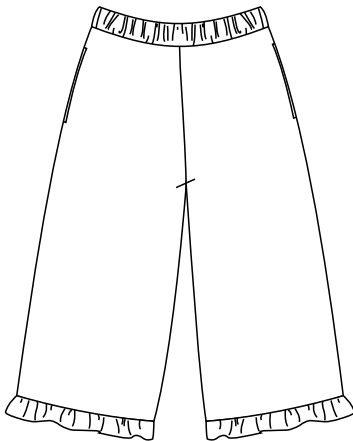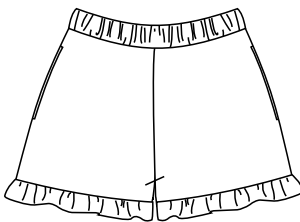TOP

PANTS

SHORTS


For technique tutorials go to
matchymatchysewingclub.com/blogs/sewing-club/tagged/tutorials
 or click here

DESCRIPTION

The Ruffle Brunch Set is a fresh and playful top and bottom duo that can be worn as a full outfit or fun separates. Designed with comfort in mind, the top features a wide scooped neckline, princess seams, and ruffles at the hems. The lightly puffed sleeves are finished with elastic and hit above the elbow. The top is slightly cropped and secured with simple ties up the front. The bottoms can be sewn as cropped pants or shorts and have a simple elastic waist, inseam pockets and matching ruffles at the hem. We love this set for pajamas, lounge-wear or elevated with accessories for a fun outfit.

With all Matchy Matchy sewing patterns, we've designed the The Ruffle Brunch Set to have simple shapes and easy construction to take the overwhelm out of sewing and to help you find the joy of discovery.

FABRIC

Light weight wovens such as linen, cotton or rayon

NOTIONS

Coordinating thread, 0.5" (1.3 cm) elastic for top, 1.5" (4 cm) elastic for pants

DIFFICULTY — ③ Intermediate: Inseam pockets, elastic channel and waistband, bias binding, front ties, baby hem

BEFORE YOU START

- Wash and dry all of your fabric before cutting.
- The pattern is drafted for a 5'5" (165 cm) individual.
- The Ruffle Brunch Set is intended to have a loose, relaxed fit. We recommend choosing your size by cross referencing with the finished garment measurements. All garments will fit individuals differently and all individuals prefer different fits, we highly recommend making a muslin first to perfect your specific fit needs.
- The top for the Ruffle Brunch Set has a generous amount of design ease built in to give the intended relaxed fit and feel. For a more fitted look consider sizing down.
- All seam allowances are included in the pattern and are 1/2" (1.3 cm) unless otherwise stated.
- Please read through all instructions before you begin.

LEGEND See mini legend on bottom of each page of sewing instructions





A NOTE ON FIT

The top for the Ruffle Brunch Set has a generous amount of design ease built in to give the intended relaxed fit and feel. For a more fitted look consider sizing down.

SIZE CHART (INCHES/CENTIMETERS)

Size	XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL
Chest	31-32 79-81.5	33-34 84-86.5	35-36 89-91.5	37-38 94-96.5	39.5-41 100.5-104.5	42.5-44 108-112	46-48 117-122	50-52 127-132	54-56 137-142	58-60 147-152	62-64 157-162
Waist	24-25 61-63.5	26-27 66-68.5	28-29 71-74	30-31 76-79	32.5-34 82.5-86.5	35.5-37 90-94	39-41 99-104	43-45 109-114.5	47-49 119-124	51-53 129-134	55-57 140-145
Hip	34-35 86.5-89	36-37 91.5-94	38-39 96.5-99	40-41 101.5-104	42.5-44 108-112	45.5-47 115.5-119.5	49-51 124.5-129.5	53-55 135-140	57-59 145-150	61-63 155-160	65-67 165-170

FINISHED GARMENT MEASUREMENTS (INCHES/CENTIMETERS)

Size	XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL
Chest	37 94	39 99	41 104	43 109	45.5 116	48.5 123	52.5 133	56.5 144	60.5 154	64.5 164	68.5 174
Waist (stretched)	37 94	39 99	41 104	43 109	45.5 116	48.5 123	52.5 133	56.5 144	60.5 154	64.5 164	68.5 174
Hip	40 102	42 107	44 112	46 117	48.5 123	51.5 131	55.5 141	59.5 151	63.5 161	67.5 171	71.5 181
Inseam (pants)	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57	22.5 57
Inseam (shorts)	3 8	3 8	3 8	3 8	3 8	3 8	3 8	3 8	3 8	3 8	3 8

TOP • FABRIC REQUIREMENTS (YARDS/METERS)

Size	XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL
44" / 112cm	2 1.8	2 1.8	2 1.8	2 1.8	2.75 2.5	2.75 2.5	2.75 2.5	3.25 3	3.25 3	3.25 3	3.25 3
54" / 137cm	2 1.8	2 1.8	2 1.8	2 1.8	2.25 2	2.25 2	2.25 2	2.75 2.5	2.75 2.5	2.75 2.5	2.75 2.5

Extra fabric may be needed to match stripes, plaids, or directional prints.

PANTS • FABRIC REQUIREMENTS (YARDS/METERS)

Size	XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL
44" / 112cm	2.5 2.3	2.5 2.3	2.5 2.3	2.5 2.3	2.75 2.5	2.75 2.5	2.75 2.5	4 3.7	4 3.7	4 3.7	4 3.7
54" / 137cm	2.5 2.3	2.5 2.3	2.5 2.3	2.5 2.3	2.75 2.5	2.75 2.5	2.75 2.5	3 2.8	3 2.8	3 2.8	3 2.8

Extra fabric may be needed to match stripes, plaids, or directional prints.

SHORTS • FABRIC REQUIREMENTS (YARDS/METERS)


Size	XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL
44" / 112cm	1.5 1.4	1.5 1.4	1.5 1.4	1.5 1.4	1.75 1.6	1.75 1.6	1.75 1.6	2 1.8	2 1.8	2 1.8	2 1.8
54" / 137cm	1.25 1.2	1.25 1.2	1.25 1.2	1.25 1.2	1.5 1.4	1.5 1.4	1.5 1.4	1.75 1.6	1.75 1.6	1.75 1.6	1.75 1.6

Extra fabric may be needed to match stripes, plaids, or directional prints.




PRINT AT HOME ASSEMBLY GUIDE

TOP

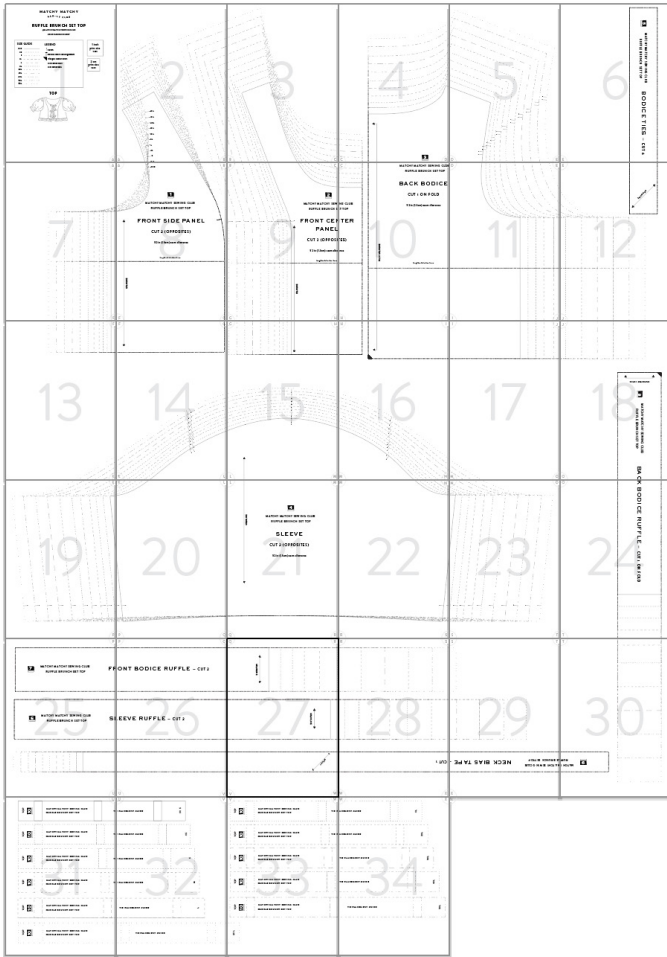

PANTS + SHORTS

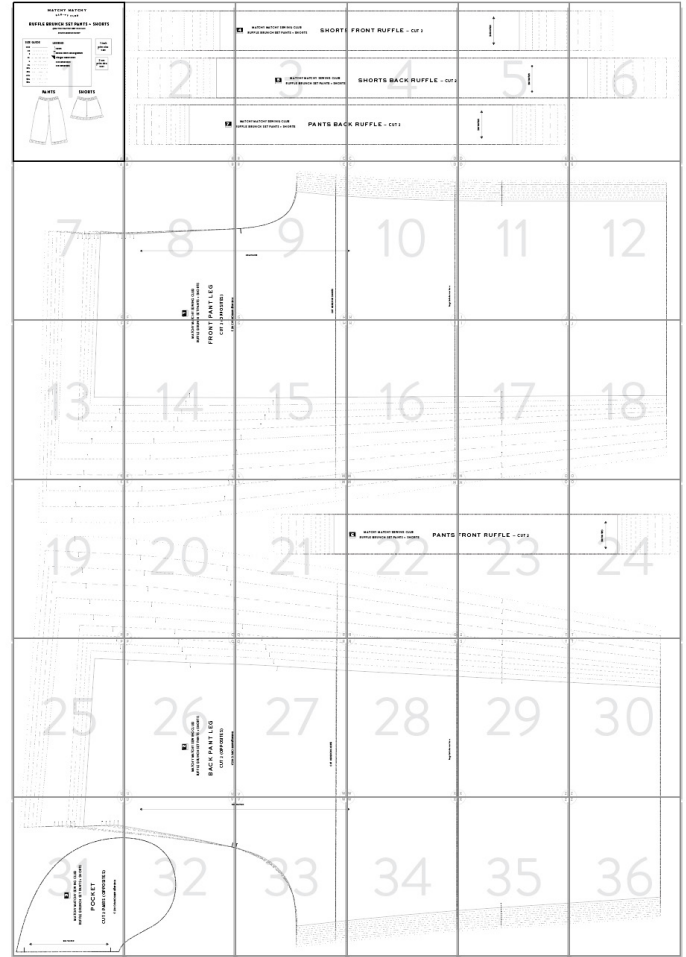

HOW TO ASSEMBLE YOUR PDF PATTERN

1. Print your PDF centered on the page at 100% scale.
2. Measure the 1" or 2 cm box to ensure that your scale is correct. If these boxes are measuring correctly then the rest of your pattern will be to scale.
3. Trim off the right and bottom sides of the paper at the outlined box.
4. Match up the circled letters at the corners of each page. Overlap the left page on top of the right page to cover the blank space outside of the outlined box and complete the circle with the matching letters. Tape together to secure.
5. Continue taping and matching all of the pages in the row. Repeat these steps for the second row. Match the second row to the first using the circled letters as a guide. Tape together to secure.
6. Cut out the pattern pieces for your desired size.

For a full tutorial on assembling
your print at home pattern go to

[https://matchymatchysewingclub.com/
blogs/sewing-club/
how-to-assemble-print-at-home-patterns](https://matchymatchysewingclub.com/blogs/sewing-club/how-to-assemble-print-at-home-patterns)

or click here



TOP Print pages 1-34 of Ruffle-Brunch-Set-Pants-Shorts-Print-at-Home.pdf

FRONT SIDE PANEL Pages 2, 7-8, 13-14	FRONT CENTER PANEL Pages 2-4, 8-10, 15-16	BACK BODICE Pages 4-5, 10-12, 16-18	SLEEVE Pages 13-17, 19-23	BODICE TIES Pages 6, 12	SLEEVE RUFFLE Pages 25-29	FRONT BODICE RUFFLE Pages 25-29	BACK BODICE RUFFLE Pages 18, 24, 30	NECK BIAS TAPE Pages 25-30	TIE PLACEMENT GUIDE Pages 31-34

FABRIC CUTTING SUGGESTIONS

These guides are meant as suggestions, please use your fabric in the way that best suits your project.
Neck Bias Tape (pattern piece 9) • To save on fabric, piece together using remaining fabric after all pieces have been cut out.


44" (112 cm) fabric 54" (137 cm) fabric

<p>Sizes XXS—M</p>	<p>Sizes XXS—M</p>
<p>Sizes L—2XL</p>	<p>Sizes L—2XL</p>
<p>Sizes 3XL—6XL</p>	<p>Sizes 3XL—6XL</p>


*Size 6XL Back Ruffle (pattern piece 8)
Instead of cutting on fold, cut 2 and piece together



PANTS Print pages 1-36 of Ruffle-Brunch-Set-Pants-Shorts-Print-at-Home.pdf

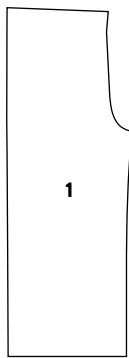


FRONT PANT LEG
Pages 7-23

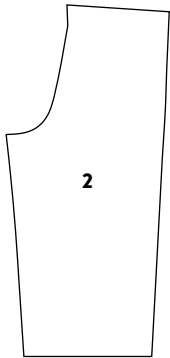


BACK PANT LEG
Pages 19-36



POCKET
Pages 31-32



PANT FRONT RUFFLE
Pages 21-24



PANT BACK RUFFLE
Pages 2-6


FABRIC CUTTING SUGGESTIONS

These guides are meant as suggestions, please use your fabric in the way that best suits your project.


44" (112 cm) fabric

54" (137 cm) fabric


Sizes XXS—M

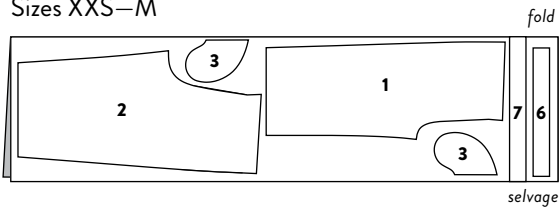


Sizes XXS—M

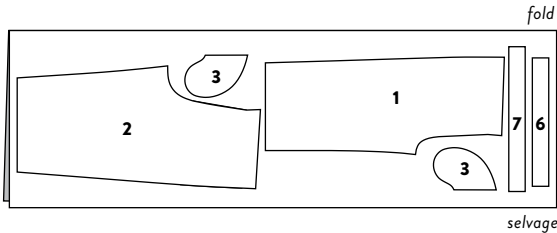


Sizes L—2XL

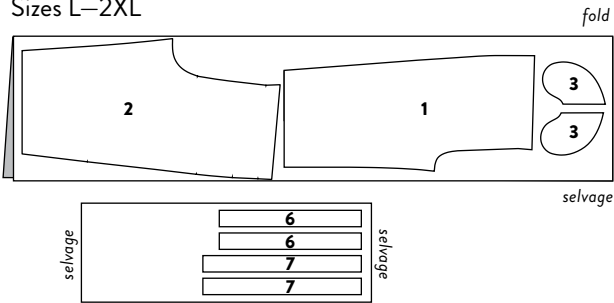


Sizes L—2XL

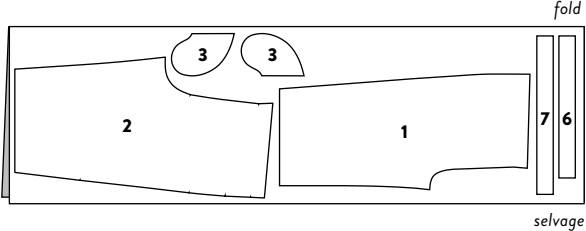

Sizes 3XL—6XL

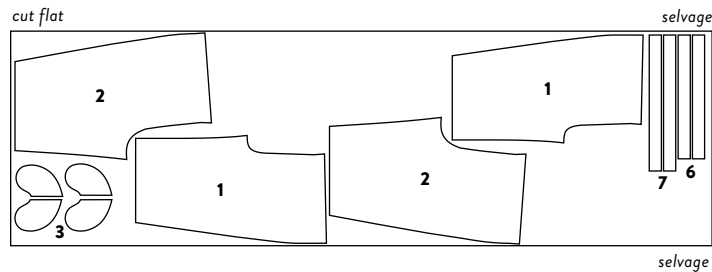


Sizes 3XL—6XL

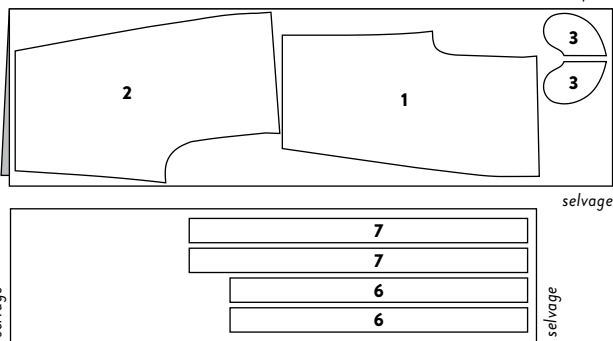




SHORTS Print pages 2-9, 13-15, 19-21, 25-27, 31-33 of Ruffle-Brunch-Set-Pants-Shorts-Print-at-Home.pdf




FRONT SHORTS LEG
Pages 7-9, 13-15, 19-21




BACK SHORTS LEG
Pages 19-21, 25-27, 31-33



POCKET
Pages 31-32



SHORTS FRONT RUFFLE
Pages 2-6



SHORTS BACK RUFFLE
Pages 2-6


FABRIC CUTTING SUGGESTIONS

These guides are meant as suggestions, please use your fabric in the way that best suits your project.


44" (112 cm) fabric

54" (137 cm) fabric


Sizes XXS—M

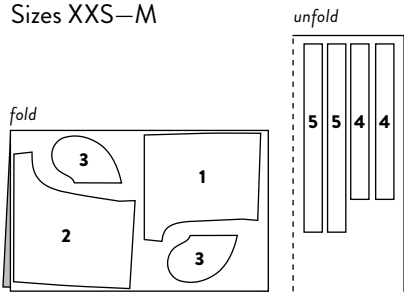


Sizes XXS—M

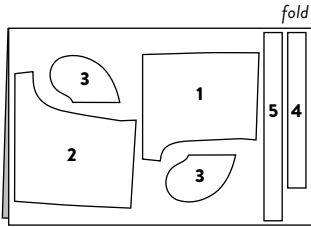


Sizes L—2XL

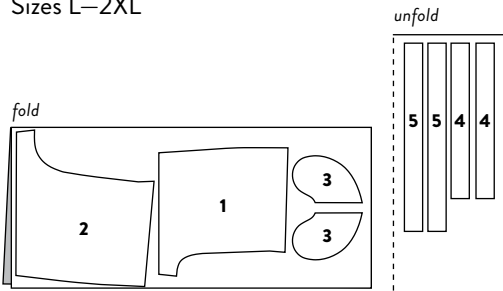


Sizes L—2XL

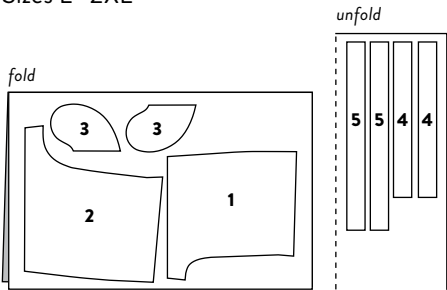

Sizes 3XL—6XL

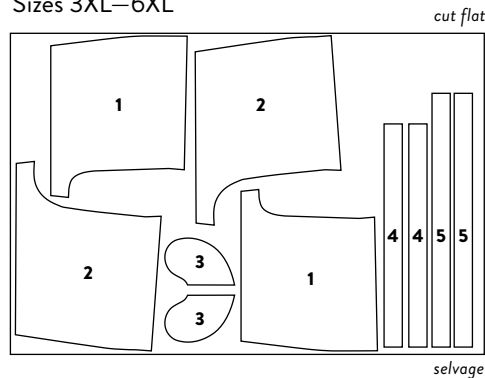


Sizes 3XL—6XL

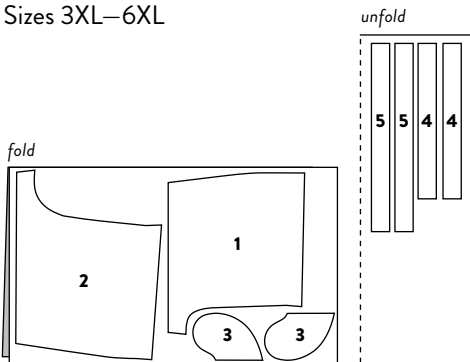

1. Label Pattern Pieces

- A. Print the pattern piece labels on pages 18-20 and pin to your fabric as you cut. This will be helpful to avoid any confusion during construction.

2. Stay Stitch Neckline

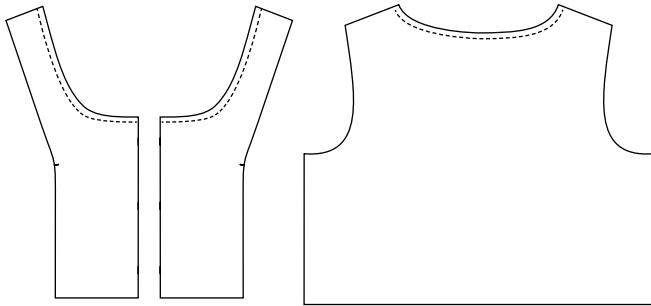

- A. Stitch a $\frac{1}{4}$ " (0.6 cm) along the necklines of the front and back bodice. Because the neckline is cut on a curve, stay stitching helps to prevent the neckline from stretching or warping during sewing.

3. Make Ties




- A. To form a crease, fold tie in half lengthwise so that wrong sides are touching. Press in place then open back up.



- B. Fold one short end $\frac{1}{4}$ " (0.6 cm) toward the wrong side. Press in place.




- C. Fold top and bottom edges toward wrong side to meet center crease. Press in place.




- D. Fold tie in half using crease mark made in step 3A as a guide. Press in place. Edgestitch along the double folded short end and the double folded long end to close the tie. Repeat steps 3A-3D for all other ties. Set ties aside.

4. Assemble Front Bodice

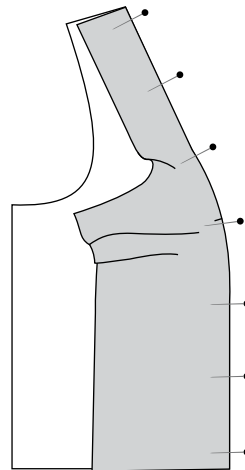


- A. With right sides together pin the front side panel to the front center panel matching at notch. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seam toward the side panel. Repeat for other side.

5. Sew Shoulder Seams

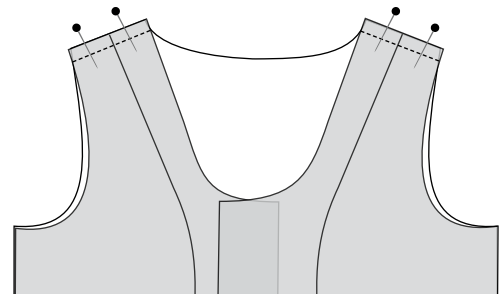


- A. With right sides together, pin front and back shoulders. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seams toward back.

6. Sew Side Seams

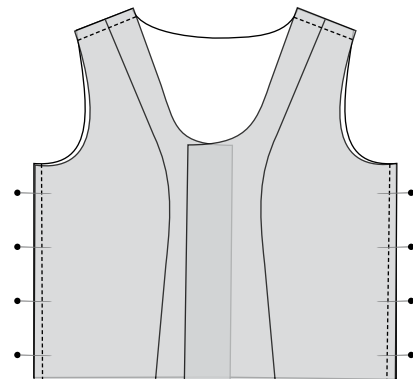


- A. With right sides together, pin front and back side seams. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seams toward back.


7. Prepare and Attach Sleeves

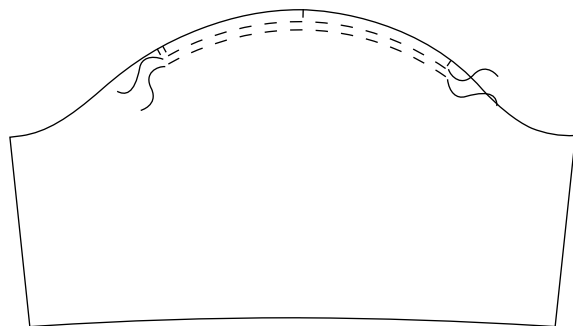

- A. Sew 2 rows of basting stitches along the top edge between the outer notches. Sew first row at $\frac{1}{4}$ " (0.6 cm) and second row at $\frac{5}{8}$ " (1.5 cm) using the longest stitch length on your machine. Leave a thread trail of 3" (8 cm) at beginning and end of stitches. Do not backstitch on either end.

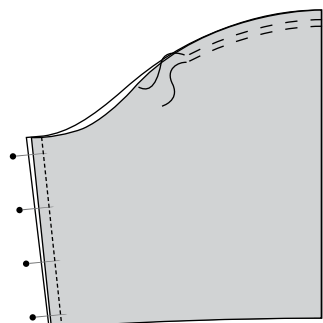


- B. With right sides touching, pin sleeve seams. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seam to one side. Gather the sleeve head by pulling bobbin threads.

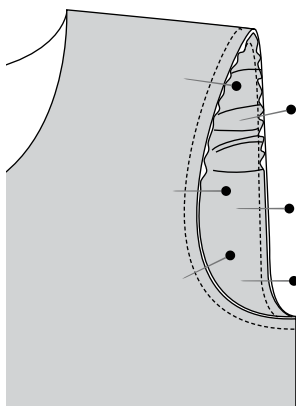


- C. With right sides together, pin sleeve into armhole matching at notches and under arm seams. Distribute gathers evenly between notches. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Remove basting stitches. Finish seam with a zig zag stitch or serger. Press seam toward body. Repeat for other sleeve.


8. Prepare Baby Hem on Cuff Ruffle

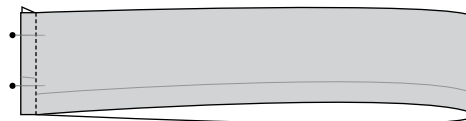


- A. With right sides facing, sew short ends of cuff with a $\frac{1}{2}$ " (1.3 cm) seam allowance, creating a loop. Finish seam with a zig zag stitch or serger. Press seam to one side.

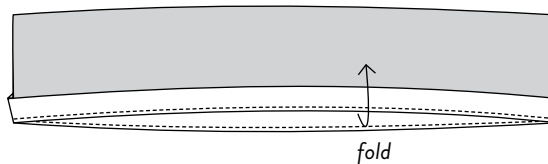


- B. Fold edge toward wrong side of fabric by $\frac{3}{8}$ " (1 cm). Press in place. Sew with a $\frac{1}{8}$ " (0.3 cm) seam allowance along folded edge.

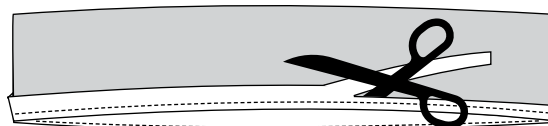

- C. Trim away excess seam allowance as close to stitch line as possible.

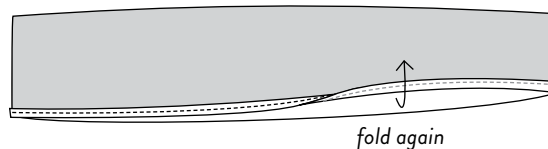


- D. Fold again toward wrong side of fabric, following the stitch line. Press in place.

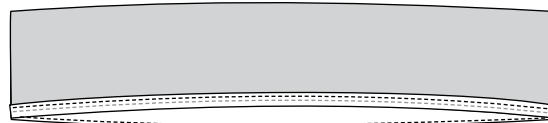


- E. Sew with a $\frac{1}{8}$ " (0.3 cm) seam allowance along the folded edge. *These two stitch lines may end up being very close together or even overlap. Only one stitch line will be visible on right side of fabric.


9. Attach Cuff Ruffle

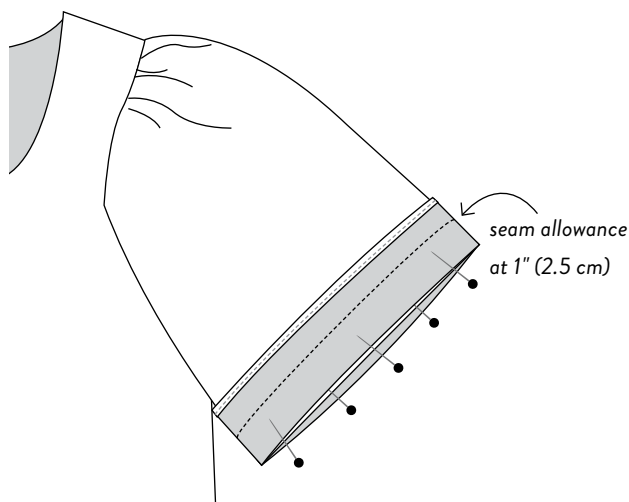


- A. With right sides together, align raw edge of cuff ruffle to raw edge of sleeve. Pin in place. Sew with a **1" (2.5 cm)** seam allowance.

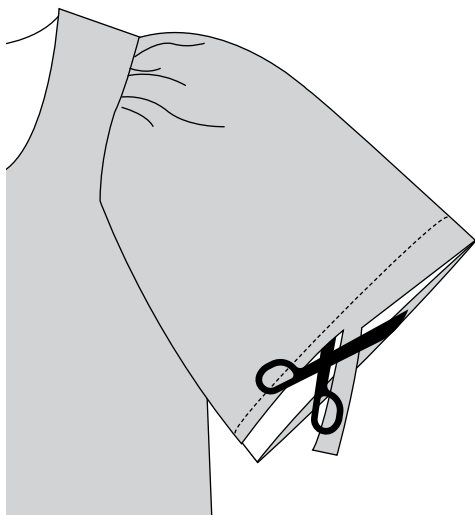


- B. From the wrong side of the garment trim the seam allowance **from the sleeve** down to $\frac{1}{4}$ " (0.6 cm). **Do not cut the seam allowance from the cuff ruffle.**

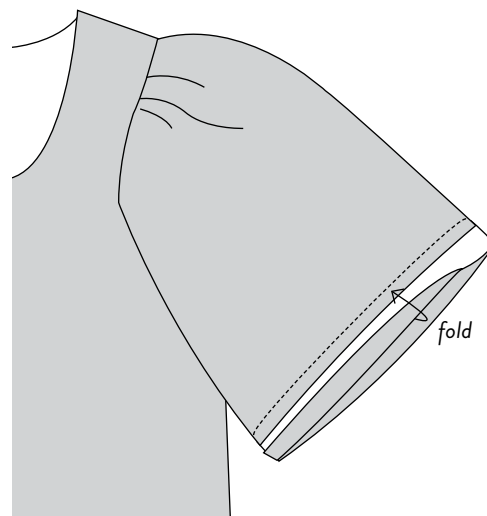

- C. Fold the uncut seam allowance from the cuff ruffle toward the inside of the garment by $\frac{1}{4}$ " (0.6 cm). Press in place.

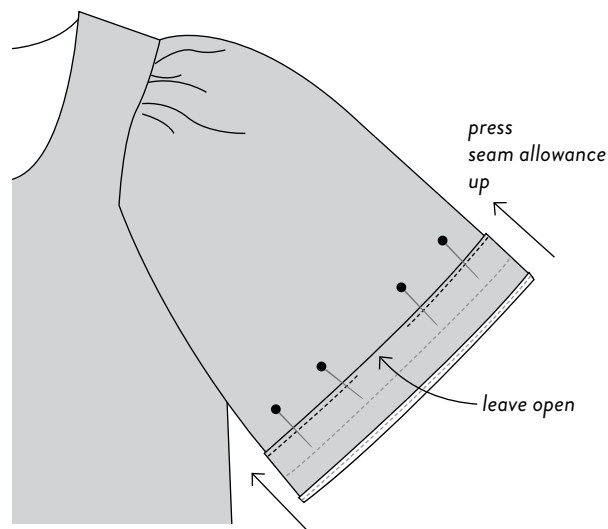

- D. To form the channel for elastic, press both seam allowances up toward the sleeve. Press and pin in place. Sew $\frac{1}{8}$ " (0.3 cm) away from the folded edge leaving a 1" (2.5 cm) opening to insert elastic.

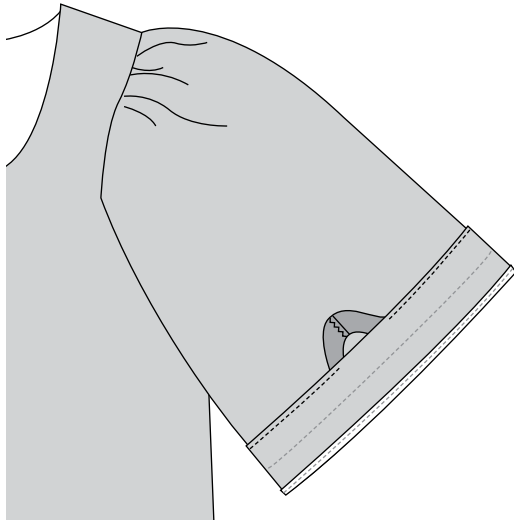

- E. Wrap elastic around your arm right above your elbow. Find the length that feels comfortable for you. Add $\frac{1}{2}$ " (1.3 cm) to this measurement. Cut 2 pieces of elastic this size, set aside.
- F. Attach a safety pin to one end of elastic and feed through the opening being careful not to twist the elastic. When the 2 elastic ends meet, overlap by $\frac{1}{2}$ " (1.3 cm). Pin in place. Sew together with a zig zag stitch, backstitch to secure. Stitch opening closed and distribute elastic evenly in the casing. Repeat steps 9A-9F for other sleeve.


10. Prepare and Attach Bodice Ruffle




- A. With right sides together sew the short sides of the front body ruffle to either side of the back body ruffle using a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seams toward back ruffle.



- B. Follow steps 8B-8E to make a baby hem on the unnotched side of the new long ruffle.

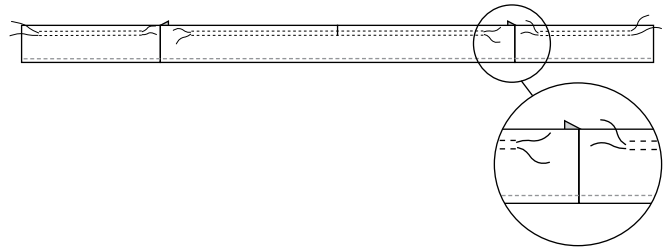


- C. To gather the ruffle, sew 2 rows of basting stitches (see step 7A for detailed directions) on upper raw edge. Start and stop stitches $\frac{1}{2}$ " (1.3 cm) from outer edges and the seams. You will have 3 separate sets of basting stitches. Gather each set.

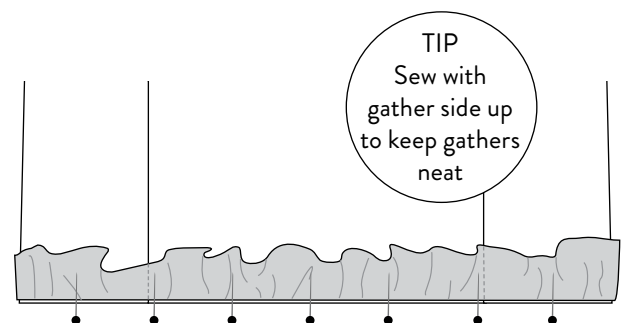


- D. With right sides together align the raw edge of the ruffle to bottom raw edge of body matching at side seams and center back notch. Distribute gathers evenly. Pin in place. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Remove basting stitches. Finish seam with a zig zag stitch or serger. Press seam toward body.


11. Attach Ties

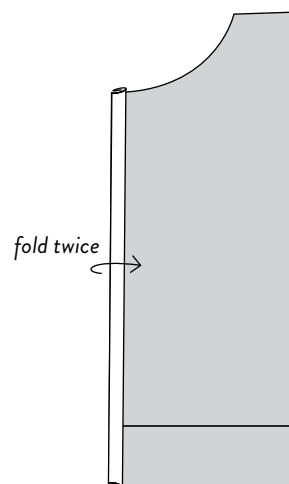


- A. Fold front opening $\frac{3}{8}$ " (1 cm) toward wrong side. Press in place. Fold again by another $\frac{3}{8}$ " (1 cm) toward wrong side. Press in place.

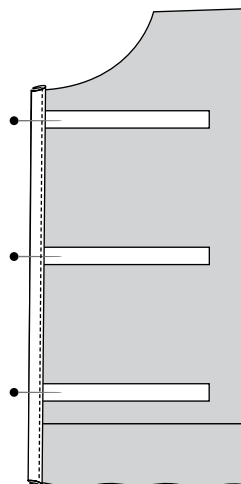

- B. Using the guide marks on the pattern, tuck the raw edge of ties under the folded flap. Pin in place. Edgestitch on the folded edge sewing through all the ties.

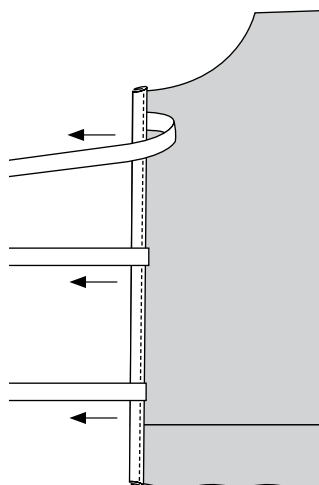


- C. Fold ties back on itself so that the ties are facing away from the body.

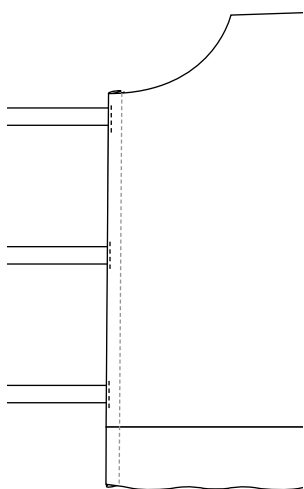


- D. From the right side of the garment, secure the ties by sewing a small stitch line where the ties meet the body.


12. Attach Neckline Bias Tape

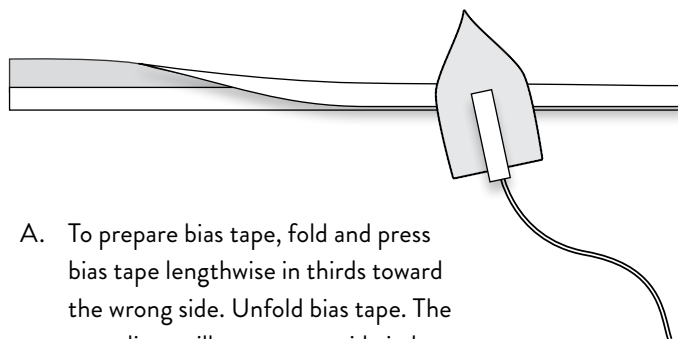


- A. To prepare bias tape, fold and press bias tape lengthwise in thirds toward the wrong side. Unfold bias tape. The press lines will serve as a guide in later steps.

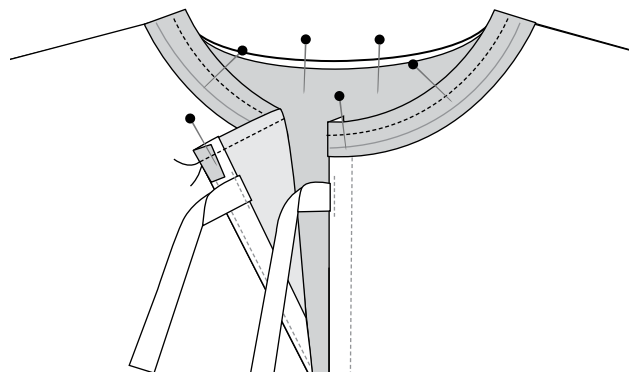


- B. With right sides together extend bias tape $\frac{1}{2}$ " (1.3 cm) from starting point. Fold extension back onto wrong side of neck opening. Pin in place. Continue to pin around neckline, being careful not to stretch bias tape. When you reach the end trim bias tape so that it extends $\frac{1}{2}$ " (1.3 cm) past the edge of neckline. Fold extension back onto wrong side of neck opening. Pin in place. Using the press line closest to neckline as a guide, sew bias tape to neckline with a $\frac{3}{8}$ " (1 cm) seam allowance.

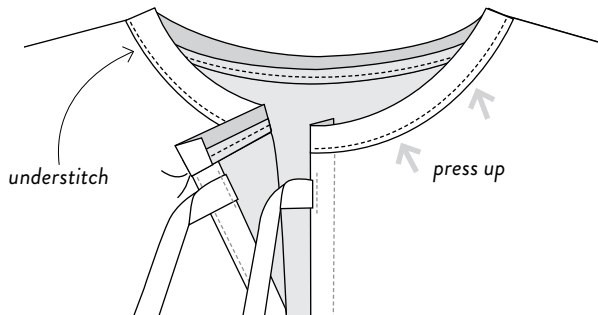


- C. Press bias tape and seam allowances up and away from neckline. Understitch seam allowance to bias tape $\frac{1}{8}$ " (0.3 cm) away from seam.

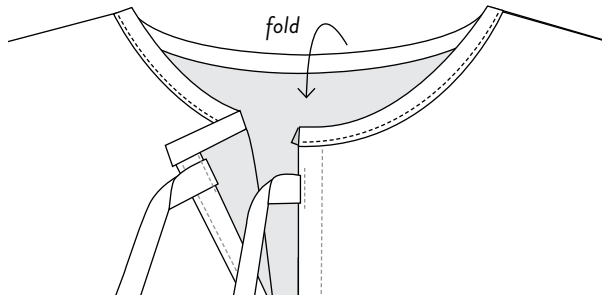

- D. Using the press line as a guide fold bias tape down $\frac{3}{8}$ " (1 cm) from raw edge toward wrong side. Press as needed. This fold will cover the seam allowance.

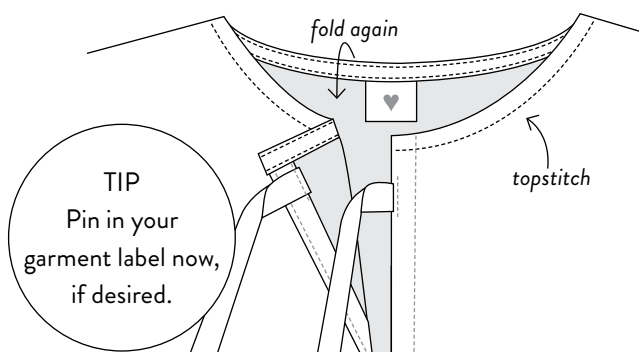

- E. Fold again another $\frac{3}{8}$ " (1 cm) toward wrong side. Work around neckline pinning in place as you go. Press as needed. The bias tape will now be on the inside of the garment and not visible on the right side. Topstitch bias tape with a $\frac{1}{8}$ " (0.3 cm) seam allowance.

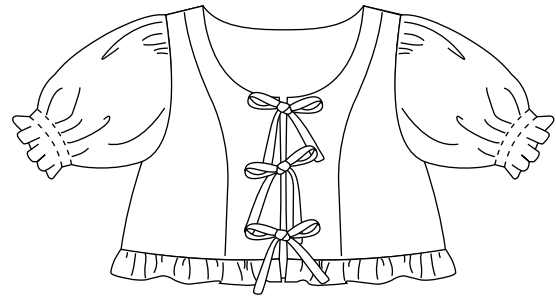


Your Top is Complete!


Now Let's Work on the Pants and Shorts

The following illustrations apply to both pants and shorts

13. Inseam Pockets

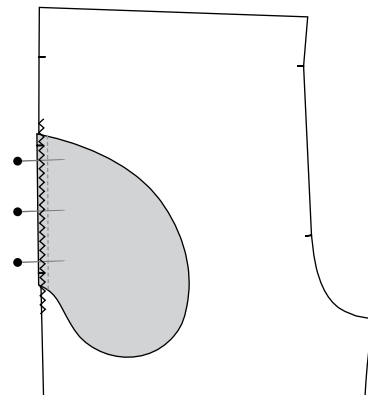


- A. With right sides together pin pocket to front leg, matching at notches. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger, starting and stopping 1" (2.5 cm) above and below the pocket opening.

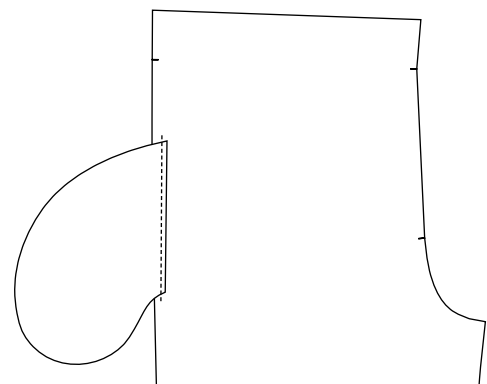


- B. With right side facing up press pocket and seam allowance away from the pant. Understitch pocket with a $\frac{1}{8}$ " (0.3 cm) seam allowance, making sure to sew through all layers. Repeat for all pockets.

14. Sew Side Seams and Inseams

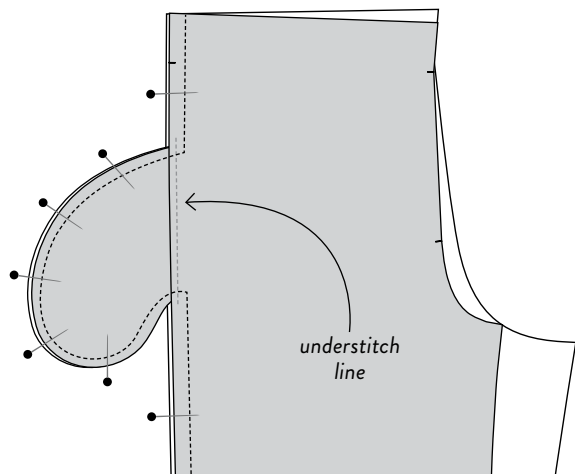


- A. With right sides together, align front and back legs at side seams. Pin in place. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. When sewing around pocket be sure to capture the understitching line within the seam allowance. This will ensure you do not see the pocket lining from the front side of your garment. Finish seam with a zig zag stitch or serger. Press seam toward the front, this will ensure the pocket falls toward the front of the garment.

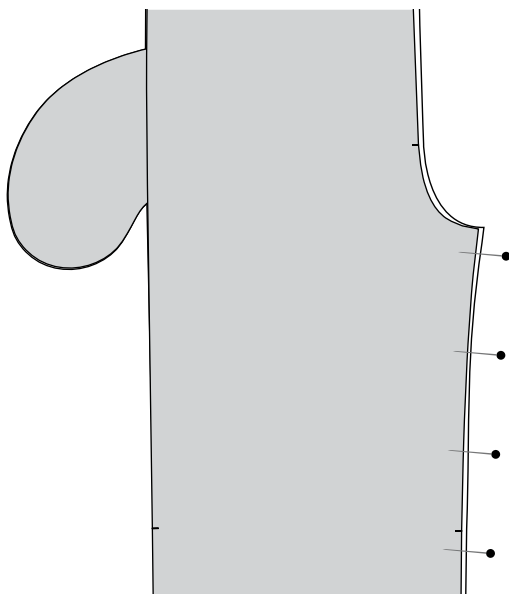


- B. With right sides together, align front and back legs at inseams. Pin in place. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish seam with a zig zag stitch or serger. Press seam toward back.

15. Connect Leg Panels

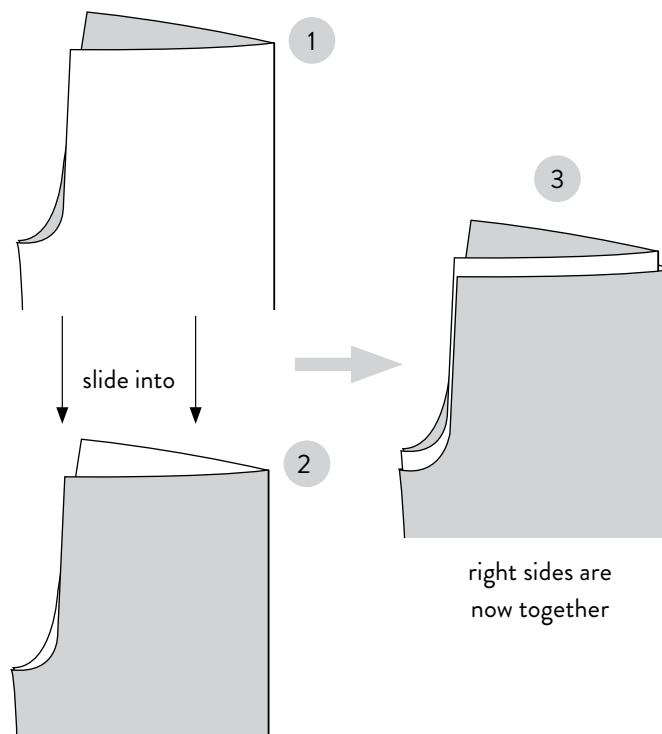


- A. Turn one leg inside out while keeping other leg right side out. Slide leg that is right side out into leg that is inside out. The right sides will now be touching.

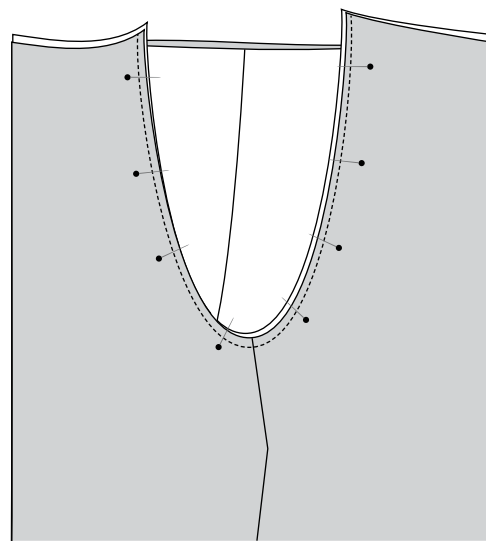


- A. Align front and back rise matching at crotch point. Pin in place. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Finish with a zig zag stitch or serger. Press seam toward one side.


16. Complete Waistband

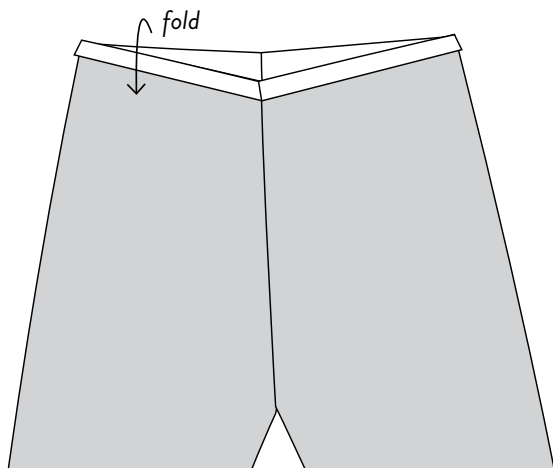


- A. Fold top raw edge down by $\frac{1}{2}$ " (1.3 cm) toward wrong side of fabric. Press in place.

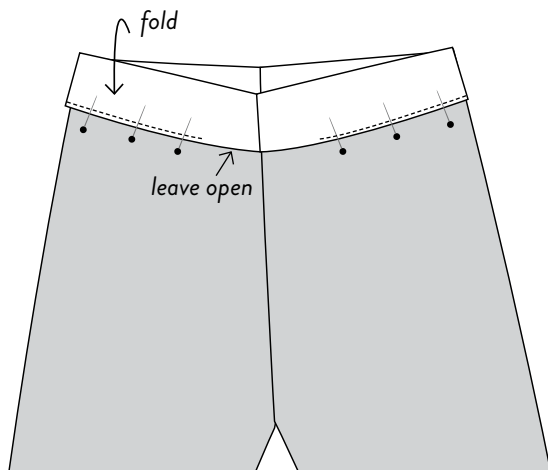


- B. Fold again by another $1\frac{3}{4}$ " (4.5 cm) toward wrong side of fabric. Press and pin in place. Edgestitch along the bottom folded edge leaving a 4" (10 cm) opening at center back forming a channel for elastic.

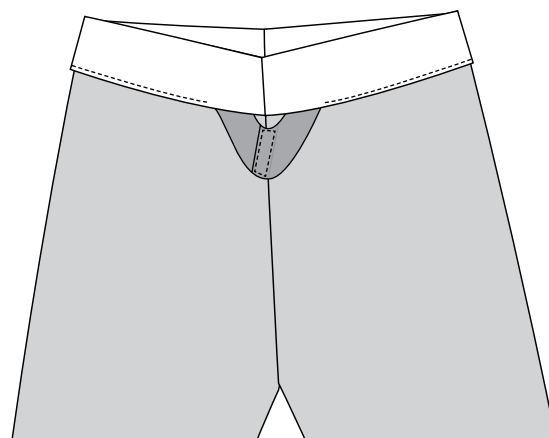

- C. Without stretching, cut a piece of $1\frac{1}{2}$ " (4 cm) elastic so that it fits comfortably around your waist plus 1" (2.5 cm). Attach a safety pin to one end of the elastic and feed it through the opening of the waistband channel making sure it does not get twisted along the way. When the two elastic ends meet overlap by 1" (2.5 cm), pin in place and sew elastic together forming a rectangle. Backstitch to secure.

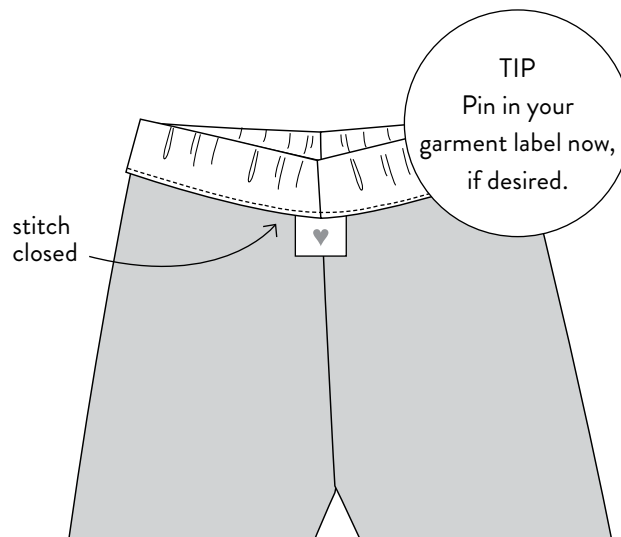

- D. Stitch the back waistband opening closed, being careful not to stitch through the elastic. Distribute the elastic evenly in the channel.

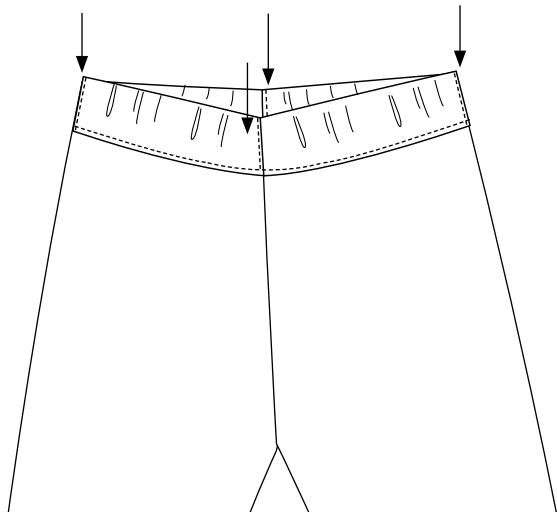


- E. With your garment right side out sew vertical lines through all layers of your waistband at the center front seam, center back seam, and side seams. This will keep your elastic in place during wear and washing.

17. Prepare and Attach Ruffle Cuff




- A. With right sides facing, sew short ends of front and back cuff with a $\frac{1}{2}$ " (1.3 cm) seam allowance, creating a loop. Finish seam with a zig zag stitch or serger. Press seam toward back. Follow steps 8A-8E to make a baby hem on one side of cuff.

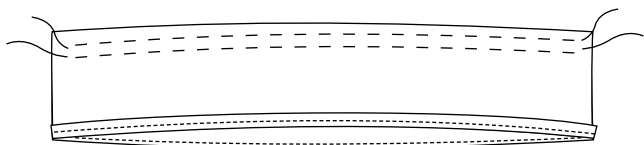

- B. To gather the ruffle, sew 2 rows of basting stitches (see step 7A for detailed directions) on upper raw edge, starting and stopping at side seams. You will have 2 sets of basting stitches. Gather each set individually.



- A. With right sides together align the raw edge of the ruffle to bottom raw edge of leg matching at side seams. Distribute gathers evenly. Pin in place. Sew with a $\frac{1}{2}$ " (1.3 cm) seam allowance. Remove basting stitches. Finish seam with a zig zag stitch or serger. Press seam toward leg. Repeat for other leg.








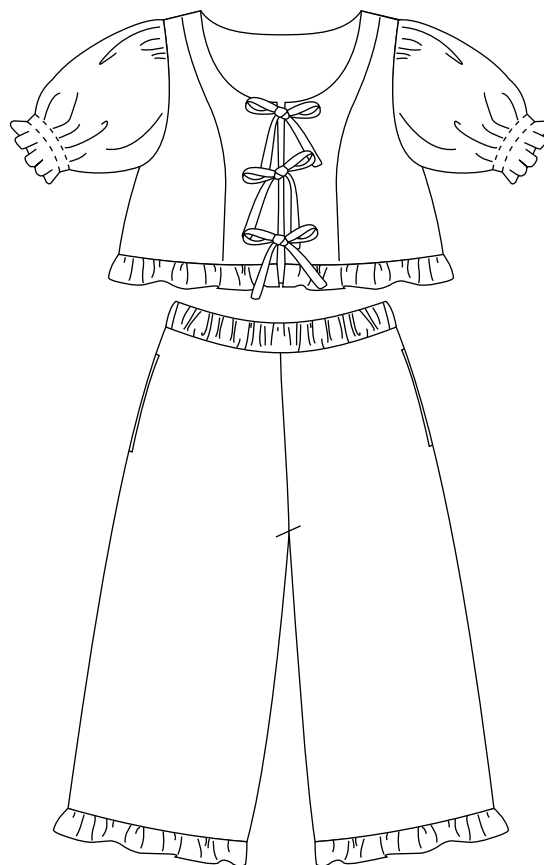








Yay, you're done!

Show us your new Ruffle Brunch Set
@matchymatchysewingclub | #rufflebrunchset

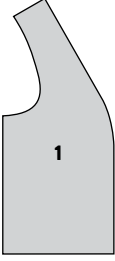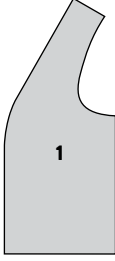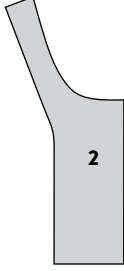
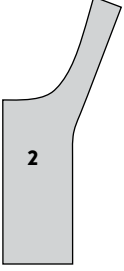
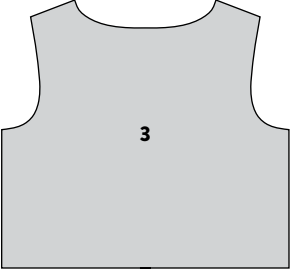
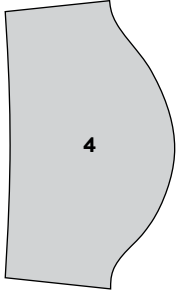
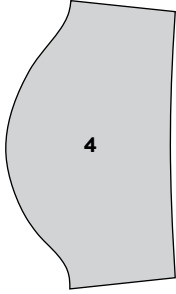
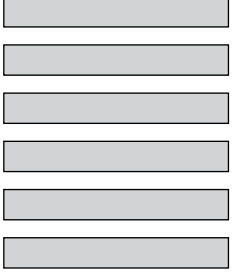




TOP

Print and cut out these labels to pin to your fabric as you cut, this will be helpful to avoid any confusion during construction.

 <p>1</p> <p>Front Side Panel Left Ruffle Brunch Set</p>	 <p>1</p> <p>Front Side Panel Right Ruffle Brunch Set</p>	 <p>2</p> <p>Front Center Panel Left Ruffle Brunch Set</p>	 <p>2</p> <p>Front Center Panel Right Ruffle Brunch Set</p>
 <p>3</p> <p>Back Bodice Ruffle Brunch Set</p>	 <p>4</p> <p>Sleeve Left Ruffle Brunch Set</p>	 <p>4</p> <p>Sleeve Right Ruffle Brunch Set</p>	<p>5</p>  <p>Bodice Ties Ruffle Brunch Set</p>
 <p>6</p> <p>Sleeve Ruffle Left Ruffle Brunch Set</p>	 <p>6</p> <p>Sleeve Ruffle Right Ruffle Brunch Set</p>	 <p>7</p> <p>Front Bodice Ruffle Left Ruffle Brunch Set</p>	 <p>7</p> <p>Front Bodice Ruffle Right Ruffle Brunch Set</p>
 <p>8</p> <p>Back Bodice Ruffle Ruffle Brunch Set</p>	 <p>9</p> <p>Bias Tape Ruffle Brunch Set</p>		

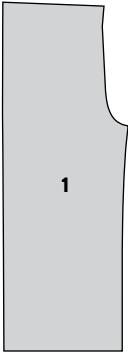
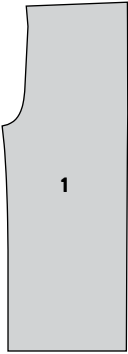
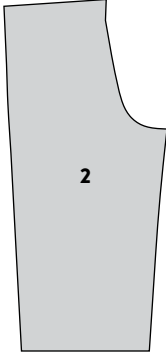
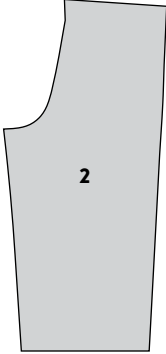






PANTS

Print and cut out these labels to pin to your fabric as you cut, this will be helpful to avoid any confusion during construction.

 <p>Front Pant Left Ruffle Brunch Set</p>	 <p>Front Pant Right Ruffle Brunch Set</p>	 <p>Back Pant Left Ruffle Brunch Set</p>	 <p>Back Pant Right Ruffle Brunch Set</p>
 <p>Pocket Left Ruffle Brunch Set</p>	 <p>Pocket Right Ruffle Brunch Set</p>	 <p>Pant Front Ruffle Left Ruffle Brunch Set</p>	 <p>Pant Front Ruffle Right Ruffle Brunch Set</p>
 <p>Pant Back Ruffle Left Ruffle Brunch Set</p>	 <p>Pant Back Ruffle Right Ruffle Brunch Set</p>		

SHORTS

Print and cut out these labels to pin to your fabric as you cut, this will be helpful to avoid any confusion during construction.

 <p>Front Shorts Left Ruffle Brunch Set</p>	 <p>Front Shorts Right Ruffle Brunch Set</p>	 <p>Back Shorts Left Ruffle Brunch Set</p>	 <p>Back Shorts Right Ruffle Brunch Set</p>
 <p>Pocket Left Ruffle Brunch Set</p>	 <p>Pocket Right Ruffle Brunch Set</p>	 <p>Shorts Front Ruffle Left Ruffle Brunch Set</p>	 <p>Shorts Front Ruffle Right Ruffle Brunch Set</p>
 <p>Shorts Back Ruffle Left Ruffle Brunch Set</p>	 <p>Shorts Back Ruffle Right Ruffle Brunch Set</p>		